

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
19 December 2002 (19.12.2002)

PCT

(10) International Publication Number  
**WO 02/100207 A2**

(51) International Patent Classification<sup>7</sup>: **A44B 18/00**

(21) International Application Number: **PCT/US02/18373**

(22) International Filing Date: **11 June 2002 (11.06.2002)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
**60/297,500 12 June 2001 (12.06.2001) US**

(71) Applicant (*for all designated States except US*): **VELCRO INDUSTRIES B.V. [NL/NL]; 22-24 Castorweg, Curacao (AN).**

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **PROVOST, George, A. [US/US]; 27 Brook Road RFD #3, Litchfield, NH 03052 (US). SHEPARD, William, H. [US/US]; 7 Highland Drive, Amherst, NH 03031 (US).**

(74) Agent: **LEBER, Celia, H.; Fish & Richardson P.C., 225 Franklin Street, Boston, MA 02110-2804 (US).**

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **LOOP MATERIALS FOR TOUCH FASTENING**

(57) Abstract: Loop materials are provided for touch fastening. The loop materials include a web of nonwoven fibrous material defining a plane, the web including: (a) raised areas, elevated above the plane of the web, defining loops constructed for engagement with male touch fastener elements; (b) rib areas surrounding the raised areas to anchor the loops; and (c) between the rib areas, either open areas, or planar areas that are substantially in the plane of the web.



**WO 02/100207 A2**

# LOOP MATERIALS FOR TOUCH FASTENING

## TECHNICAL FIELD

This invention relates to loop materials for touch fastening.

## BACKGROUND

5 This invention relates to loop material, particularly to material to be engaged with hooking members to form a fastening, to its manufacture and use, and to fasteners comprising such loop material.

10 In the production of woven and non-woven materials, it is common to form the material as a continuous web that is subsequently spooled. In woven and knit loop materials, loop-forming filaments or yarns are included in the structure of a fabric to form upstanding loops for engaging hooks. As hook-and-loop fasteners find broader  
15 ranges of application, especially in inexpensive, disposable products, some forms of non-woven materials have been suggested to serve as a loop material to reduce the cost and weight of the loop product while providing adequate closure performance in terms of peel and shear strength. Nevertheless, cost of the loop component has remained a major factor limiting the extent of use of hook and loop fasteners.

20 To adequately perform as a loop component for touch fastening, the loops of the material must be exposed for engagement with mating hooks. Unfortunately, compression of loop material during packaging and spooling tends to flatten standing loops. In the case of diapers, for instance, it is desirable that the loops of the loop material provided for diaper closure not remain flattened after the diaper is unfolded and ready for use.

25 Also, the loops generally should be secured to the web sufficiently strongly so that the loop material provides a desired degree of peel strength when the fastener is disengaged, and so that the loop material retains its usefulness over a desired number of closure cycles. The desired peel strength and number of closure cycles will depend on the application in which the fastener is used. For example, a higher number of

closure cycles is typically required when the fastener is used in a bag closure than when the fastener is used in a diaper closure.

The loop component should also have sufficient strength, integrity, and secure anchoring of the loops so that the loop component can withstand forces it will encounter during use, including dynamic peel forces and static forces of shear and tension.

### SUMMARY

We have realized that non-woven fabrics constructed with certain structural features are capable of functioning well for their intended purpose as hook-engageable loop fabrics, while providing particular advantage in regard to expense of manufacture and other properties.

According to one aspect, the invention features a loop material for touch fastening that includes a web of nonwoven fibrous material defining a plane. The web includes (a) raised areas, elevated above the plane of the web, defining loops constructed for engagement with male touch fastener elements; (b) rib areas surrounding the raised areas to anchor the loops; and (c) between the rib areas, planar areas that are substantially in the plane of the web.

According to an alternate aspect of the invention, the web includes, instead of planar areas, open areas (apertures) between the rib areas.

Implementations of the invention may include one or more of the following features. The rib areas include a polymeric reinforcing material. The rib areas extend above the plane of the web. The planar areas include unbonded fibers, i.e., the fibers in the planar areas are substantially unfused. The planar areas are substantially free of polymeric reinforcing material. Alternatively, the planar areas include fibers backed by a layer of polymeric reinforcing material. The rib areas include closed members (closed geometric shapes) that surround the raised areas. The raised areas are polygonal and the closed members include polygons. Alternatively, the raised areas are substantially dome-shaped and the closed members include rings or ellipses. The rib areas further include connecting members extending between the closed members. The closed members and the connecting members together define a network. The open areas and the network define a net material. The web is a carded web. The

carded web includes staple fibers. The polymeric reinforcing material is the same material as the fibrous material. At least some of the closed members are tangential to each other.

In a further aspect, the invention features a loop material for touch fastening including a web of nonwoven fibrous material defining a plane, the web including: (a) raised areas, elevated above the plane of the web, defining loops constructed for engagement with male touch fastener elements; and (b) rib areas surrounding the raised areas to anchor the loops, the rib areas having a height of at least 0.003 inch above the plane of the web.

The invention also features methods of forming loop materials.

In one aspect, the invention features a method of forming a loop material for touch fastening. The method includes: (a) passing a nonwoven web through a nip between a flat roll and an embossing roll; and (b) during step (a), applying pressure to the nonwoven web. The embossing roll includes a patterned surface comprising depressions, grooves and lands which correspond, respectively, to raised areas, rib areas and planar or open areas of the loop material, the raised areas defining loops constructed for engagement with male touch fastener elements, and the rib areas surrounding the raised areas to anchor the loops.

Implementations of this aspect of the invention may include one or more of the following features. The nonwoven web has a basis weight of less than about 1 osy, more preferably less than about 0.5 osy. The method further includes heating at least one of the rolls to a temperature of from about 250°F to 400°F. Step (b) is conducted at a pressure of from about 1,000 psi to 20,000 psi, more preferably at least 10,000 psi.

By "hook-engageable" and similar terms used above and throughout this specification, we mean that the loop material defines openings of size adequate to receive the tip or head portion of a male fastener element (such as a hook-shape or mushroom-shape element, for instance) for forming a fastening, and that the openings are exposed and extended for engagement.

The invention can provide an inexpensive loop product which can effectively engage and retain hooks, such as in hook-and-loop fasteners. The loop product can be particularly useful in combination with extremely small, inexpensive molded hooks as

fasteners for disposable products, such as diapers, medical devices or packaging. We have found, for instance, that the structure of the material, described below in more detail, helps to prevent permanent flattening of the loops and provides some advantageous crush resistance.

Moreover, the balance of properties of the loop material (e.g., cost, weight, strength and durability) can be easily adjusted, as will be discussed below.

Other features and advantages of the invention will be apparent from the description and drawings, and from the claims.

## DESCRIPTION OF DRAWINGS

Fig. 1 is a microphotograph of a loop material according to one embodiment of the invention. Fig. 1A is a microphotograph showing an enlarged end view of the loop material of Fig. 1.

Fig. 2 is a schematic plan view of the loop material shown in Fig. 1. Fig. 2A is an enlarged schematic cross-sectional view of the loop material of Fig. 2, taken along line A-A. Fig. 2B is a further enlarged detail view of area B of Fig. 2A.

Fig. 3 is a schematic plan view of a loop material according to another embodiment of the invention, in which the loop material includes connecting ribs. Fig. 3A is an enlarged detail view of a portion of the material shown in Fig. 3. Fig. 3B is a cross-sectional view of a single rib, taken along line B-B in Fig. 3A.

Figs. 4 and 5 are schematic plan views of loop materials according to other alternate embodiments of the invention.

Fig. 6 is a perspective view of an embossing roll used in manufacturing the loop material shown in Fig. 3. Fig. 6A is a highly enlarged view of detail A in Fig. 6. Fig. 6B is a partial cross-sectional view taken along line B-B in Fig. 6A.

Figs. 7 and 8 are partial cross-sectional views similar to that shown in Fig. 6B, but showing alternate geometries for the roll surface.

## DETAILED DESCRIPTION

Preferred loop materials include a nonwoven web having raised areas, elevated above the plane of the web, which define loops constructed for engagement



with male touch fasteners. The raised areas provide regions of loose, uncompressed fibers that are capable of being engaged by hooking elements. The raised areas are surrounded by rib areas, which preferably include a bead of polymeric reinforcing material. Portions of the loose fibers are embedded and fixed in the polymeric material and can therefore support loads from the engaging hooks. Between the rib areas lie other areas which may either be open areas, or planar areas of the nonwoven web, as will be discussed in detail below.

A preferred loop material is shown in Figs. 1-1A and 2-2B. In this embodiment, the loop material 10 includes raised areas in the form of loop domes 12, ring-shaped rib areas 14 surrounding the loop domes 12, and connecting rib areas 16 extending between the ring-shaped rib areas 14. Between the rib areas 14, 16 lie planar areas 18 of compressed fibers. The planar areas 18 lie substantially in the plane of the web, and are not intended for engagement with hook members.

In the embodiment shown in Figs. 1-1A and 2-2B, the loop material 10 may be formed by passing a lightweight nonwoven web and a polymeric film layer through an embossing roll under pressure, as will be discussed in further detail below. The embossing roll includes channels corresponding to the rib areas 14, 16, along which the polymer of the film layer can flow in response to the applied pressure. As a result, the polymer provided by the film layer migrates preferentially into the rib areas, leaving the planar areas and loop domes relatively free of polymer. The highly compressed fibers in the planar areas are lightly bonded to each other by the remaining polymer, producing a very thin and flexible film in this area. The displacement of most of the polymer into the rib areas creates an overall flexible fabric.

The ratio between the planar areas and raised areas may be adjusted to produce plastic ridges of sufficient dimension to be an effective fiber anchor using a polymeric film of any desired thickness. A high ratio of planar areas to raised areas ensures good fiber anchoring, but reduces the amount of available hook engaging fibers. The planar areas should comprise less than less than 50% of the total surface area of the loop material, preferably less than 25%, and more preferably less than 10%.

Referring to Figs. 2A and 2B, the loop domes preferably have a height  $H_D$  of from about 0.030 to 0.100 inch. The ring-shaped rib areas preferably have a height  $H_R$  of from about 0.003 to 0.030 inch, and a width  $W_R$  of from about 0.003 to 0.030 inch. The planar areas preferably have a height  $H_P$  of from about 0.003 to 0.010 inch.

5 Referring to Fig. 3B, the connecting ribs 16 have a height  $H_c$  of from about 0.003 to 0.030 inch, and a width  $W_c$  at the base of from about 0.003 to 0.030 inch.

In an alternate embodiment, shown in Fig. 3, loop material 20 includes loop domes 12 and rib areas 14, as discussed above. In this embodiment, however, the connecting rib areas 16' connect every loop dome to all six adjoining loop domes, and  
10 the areas 20 in between the rib areas 14, 16 are open, rather than planar. In this case, all of the material between the rib areas, both fibers and polymer, has been forced into the rib areas, leaving an open net loop material. This material is lightweight, breathable and may in some cases be stretchable.

The multiple connecting rib areas 16', shown in Fig. 3, can also be used in  
15 embodiments in which the areas between the rib areas are planar fiber areas, rather than open areas.

In an alternate embodiment, shown in Fig. 5, the loop material includes multiple parallel connecting rib areas 16. When multiple connecting rib areas are used, the polymer does not need to be displaced as far as is necessary to form the  
20 single connecting rib structure shown in Fig. 1. This arrangement can be accomplished by using more resin than is used for the single connecting rib structure, and/or by making the multiple connecting ribs lower than the single connecting ribs, depending upon how much strength is required.

The connecting ribs can also form a cross-hatch pattern with either round or  
25 square loop domes, e.g., as shown in Fig 4.

Suitable nonwoven webs include carded webs, spunbonded webs, air-laid webs, hydroentangled webs, meltblown webs, wet-laid webs, and needled webs. The nonwoven web may be formed of staple fibers or continuous fibers.

Generally, carded webs formed of staple fibers are preferred. It is also  
30 preferred that the web have a low basis weight, preferably less than 1 ounce/yd<sup>2</sup> (osy), more preferably less than 0.5 osy. Low basis weight webs also have a low fiber

density. This produces a very open fiber structure in the raised areas that enables hook elements to easily penetrate and engage the fibers.

5 Staple fibers are preferred because the strength or tenacity of each fiber is generally higher for a given fiber diameter than in nonwoven webs made from spunbonded or melt blown fibers. Also, staple fibers are available in a wider range of types and sizes, allowing more flexibility in designing a loop material with a desired balance of properties.

10 The preferred carded webs may be produced using methods well known to those familiar with carding technology. Preferred webs include staple fibers of 2 to 10 deniers, more preferably 3 to 6 deniers. The fibers are typically 1 to 6 inches in length, preferably 2 to 4 inches. Thus, the preferred fiber length is significantly greater than the preferred diameters of the loop domes 12. As a result, a single fiber will generally be anchored by several of the ring-shaped rib areas 14, resulting in secure anchoring of the fiber, and will be present in several loop domes 12.

15 Suitable fiber resins include polyester, polyethylene, polypropylene, nylon and other thermoplastics. The fibers can be formed of a single resin or a combination of two or more resins. If a combination of resins is desired, this can be provided as a blend of single-component fibers, or as bicomponent fibers produced by co-extrusion, e.g., so that one resin forms a sheath around the other resin.

20 When the nonwoven web is processed to form the loop material, the nonwoven web may be supported by a polymeric film, as discussed above, or unsupported. The polymeric film may be a thin thermoplastic film such as polyethylene, polypropylene, or polyvinyl chloride (PVC). The film thickness is preferably from about 0.0005 to 0.005 inches, more preferably from 0.001 to 0.003 inches.

25 The nonwoven web, either supported or unsupported, is passed through the nip of a high pressure heated set of calendar rolls. One of the rolls has a smooth flat surface and the other roll, the embossing roll, has a patterned surface comprising depressions, grooves, and lands which correspond, respectively, to the loop domes 12, connecting ribs 16 and planar or open areas 18 of the finished product. As the web  
30 passes through the nip, molten resin in the flat areas is forced into the grooves and forms the network of ribs 16 that interconnect the loop domes. It is generally not



necessary to provide grooves around the depressions to form the ring-shaped ribs; resin will flow from the flat areas around the inner periphery of the depressions, forming the ring-shaped ribs.

5 The depth of the grooves will correspond to the desired height of the ribs, assuming that there is enough material to fill the grooves and sufficient pressure is applied at the nip. Generally, the depth D of the grooves (Fig. 6B) is between .003 to .030 inches. The width W of the grooves corresponds to the width of the connecting ribs at their top surface, again assuming that the grooves completely fill with resin.

10 Figs. 6-6B show an embossing roll 100, which is suitable for making the product shown in Fig. 3. Embossing roll 100 includes dome-shaped depressions 102, grooves 104, and lands 106. The grooves 104 can have the profile shown in Fig. 6B. This is generally the easiest shape to machine.

Alternatively, the grooves 104 can have a semi-circular cross-sectional profile, as shown in Fig. 7, or a profile similar to that in Fig. 6B but with radiused or  
15 chamfered edges, as shown in Fig. 8. The transition region between the rib areas and the planar areas may in some cases be sensitive to rupture, in which case the geometries shown in Figs. 7 and 8, in which a transition zone (a softened edge such as a radius or compound radius) is provided, are preferred.

In Fig. 7, the curved top edge 110 of groove 102 has a transition radius  $R_T$ .  
20 The inside surface 112 of the groove is also curved, with a radius of curvature R. In Fig. 8, the top edge 110 of groove 102 includes a chamfered surface 114, which provides a transition angle A.

Alternatively, some other form of tooling relief or approach angle may be used in that area to accomplish the same purpose.

25 The temperature of the rolls and the pressure they apply will depend on the softening temperatures of the web fiber resin(s) and the polymeric film, if one is used. These parameters are adjusted to achieve the proper melt of the resin that will form the rib areas, without damaging the integrity or the functionality of the fibers in the raised areas. Different temperatures might also be required on the flat and patterned  
30 rolls to achieve the desired results. Typical temperatures can range from 250°F to 400°F or more, depending on process speed, and pressures from 1,000 psi to 20,000 psi or more, preferably at least 10,000 psi.

Examples of suitable combinations of materials include the following: (1) a carded web of polyester fibers with a melt temperature of 485°F and a support film of polyethylene that melts at 275°F; (2) a carded web of polyester fibers with a melt of 485°F blended with 25% polyethylene fibers that melt at 275°F, with no support film; (3) a carded web of a co-extruded polyester fiber with an outer shell of polyester with a melt of 285°F and a core of a polyester with a melt of 485°F. In all of these examples there is a substantial melt temperature differential between the two resins in the overall structure. This allows a broader acceptable range of temperature and pressure.

Alternatively, the web can be made entirely of a single type fiber, and the web itself can be used as the resin that forms the rib regions. This alternative will require more precise control over temperature and pressure. In this case, the transition between the ribs and planar areas tends to be particularly sensitive to rupture, and thus it is preferred that the groove geometry shown in Fig. 7 be used.

In addition to, or instead of, selecting fibers and films of different melt temperatures, resins having different hardness characteristics can achieve similar anchoring effects. Relatively softer materials can flow to form rib areas and encapsulate harder fibers under high pressures, without requiring elevated temperatures during the embossing process. Eliminating heating will reduce the potential thermal damage to the hook engaging fibers.

The geometry of the patterned roll can be selected to produce a desired end result. The domes and grooves can have any desired shape. The depressions must merely be deep enough to prevent excessive compression of the fibers or other damage to the functional fiber domes they produce. The spacing or lands between these depressions are designed such that, under the appropriate temperature and pressure for the chosen resins, they displace molten plastic into the grooves, as discussed above.

The properties of the loop material can be relatively easily adjusted, by adjusting the amount of reinforcing resin used and/or changing the depth, number and/or arrangement of the rib members. If more resin is used, the loop material will generally be stronger, but also will be more expensive and heavier. If more rib members and/or thicker rib members are used, this will also generally increase the

strength of the loop material. Thus, in applications where high strength is not needed, the loop material can be engineered to be low cost and lightweight, while if high strength is required the loop material can be engineered to provide this property.

Other embodiments are within the scope of the following claims.

5       For example, the closed rib areas surrounding the raised areas have been shown as ring-shaped. However, these rib areas can have any desired shape, e.g., octagonal, square, triangular or diamond-shaped. Moreover, while the connecting rib areas have been shown as linear, if desired they could be curved or have any desired shape.

10       Additionally, one or more additional layers can be applied to the loop material, e.g., in a post-process, for reinforcement or to provide other desired properties. Suitable additional layers include reinforcing scrims, glass filaments, pressure sensitive adhesives, and foams. These layers can be applied by any suitable method, e.g., by coating, laminating, or adhering.

**WHAT IS CLAIMED IS:**

1. A loop material (10) for touch fastening comprising:  
a web of nonwoven fibrous material defining a plane, the web including:  
(a) raised areas (12), elevated above the plane of the web, defining loops constructed for engagement with male touch fastener elements;  
(b) rib areas (14,16) surrounding the raised areas to anchor the loops; and  
(c) between the rib areas, planar areas (18) that are substantially in the plane of the web.
2. A loop material (20) for touch fastening comprising:  
a web of nonwoven fibrous material defining a plane, the web including:  
(a) raised areas (12), elevated above the plane of the web, defining loops constructed for engagement with male touch fastener elements;  
(b) rib areas (14, 16') surrounding the raised areas to anchor the loops; and  
(c) between the rib areas, open areas.
3. The loop material of claim 1 or 2 wherein said rib areas comprise a polymeric reinforcing material.
4. The loop material of claim 1 or 2 wherein said rib areas extend above the plane of the web.
5. The loop material of claim 1 wherein said planar areas comprise unbonded fibers.
6. The loop material of claim 1 or 5 wherein said planar areas comprise fibers backed by a layer of a polymeric reinforcing material.
7. The loop material of claim 1, 5 or 6 wherein said planar areas are substantially free of polymeric reinforcing material.

8. The loop material of any of the preceding claims wherein said rib areas comprise closed members that surround said raised areas.
9. The loop material of claim 8 wherein said raised areas are polygonal and said closed members comprise polygons.
10. The loop material of claim 8 wherein said raised areas are substantially dome-shaped and said closed members comprise rings or ellipses.
11. The loop material of claim 8 wherein at least some of said closed members are tangential to each other.
12. The loop material of claim 8 wherein said rib areas further comprise connecting members extending between said closed members.
13. The loop material of claim 12 wherein said closed members and said connecting members together define a network.
14. The loop material of claim 13 wherein the open areas and network define a net material.
15. The loop material of any of the preceding claims wherein the web comprises a carded web.
16. The loop material of claim 15 wherein said carded web comprises staple fibers.
17. The loop material of claim 3 wherein said polymeric reinforcing material is the same material as the fibrous material.
18. A loop material (10) for touch fastening comprising:  
a web of nonwoven fibrous material defining a plane, the web including:



(a) raised areas (12), elevated above the plane of the web, defining loops constructed for engagement with male touch fastener elements; and

(b) rib areas (14, 16) surrounding the raised areas to anchor the loops, the rib areas having a height of at least 0.003 inch above the plane of the web.

19. A method of forming a loop material (10) for touch fastening, , the method comprising:

(a) passing a nonwoven web through a nip between a flat roll and an embossing roll (100); and

(b) during step (a), applying pressure to the nonwoven web;

wherein the embossing roll (100) includes a patterned surface comprising depressions (102), grooves (104) and lands (106) which correspond, respectively, to raised areas (12), rib areas (14, 16) and planar (18) or open areas of the loop material (10), the raised areas defining loops constructed for engagement with male touch fastener elements, and the rib areas surrounding the raised areas to anchor the loops.

20. The method of claim 19 wherein said nonwoven web has a basis weight of less than about 1 osy.

21. The method of claim 19 wherein said nonwoven web has a basis weight of less than about 0.5 osy.

22. The method of any of claims 19-21 further comprising heating at least one of the rolls to a temperature of from about 250°F to 400°F.



23. The method of any of claims 19-22 wherein step (b) is conducted at a pressure of from about 1,000 psi to 20,000 psi.




24. The method of claim 23 wherein step (b) is conducted at a pressure of at least 10,000 psi.

25. The method of any of claims 19-24 wherein said web comprises a carded web.

26. The method of any of claims 19-25 further comprising, during step (a), passing a polymeric film through the nip with the nonwoven web.

27. The method of any of claims 19-26 wherein the pressure applied is sufficient to cause material to flow from the planar areas into the rib areas.

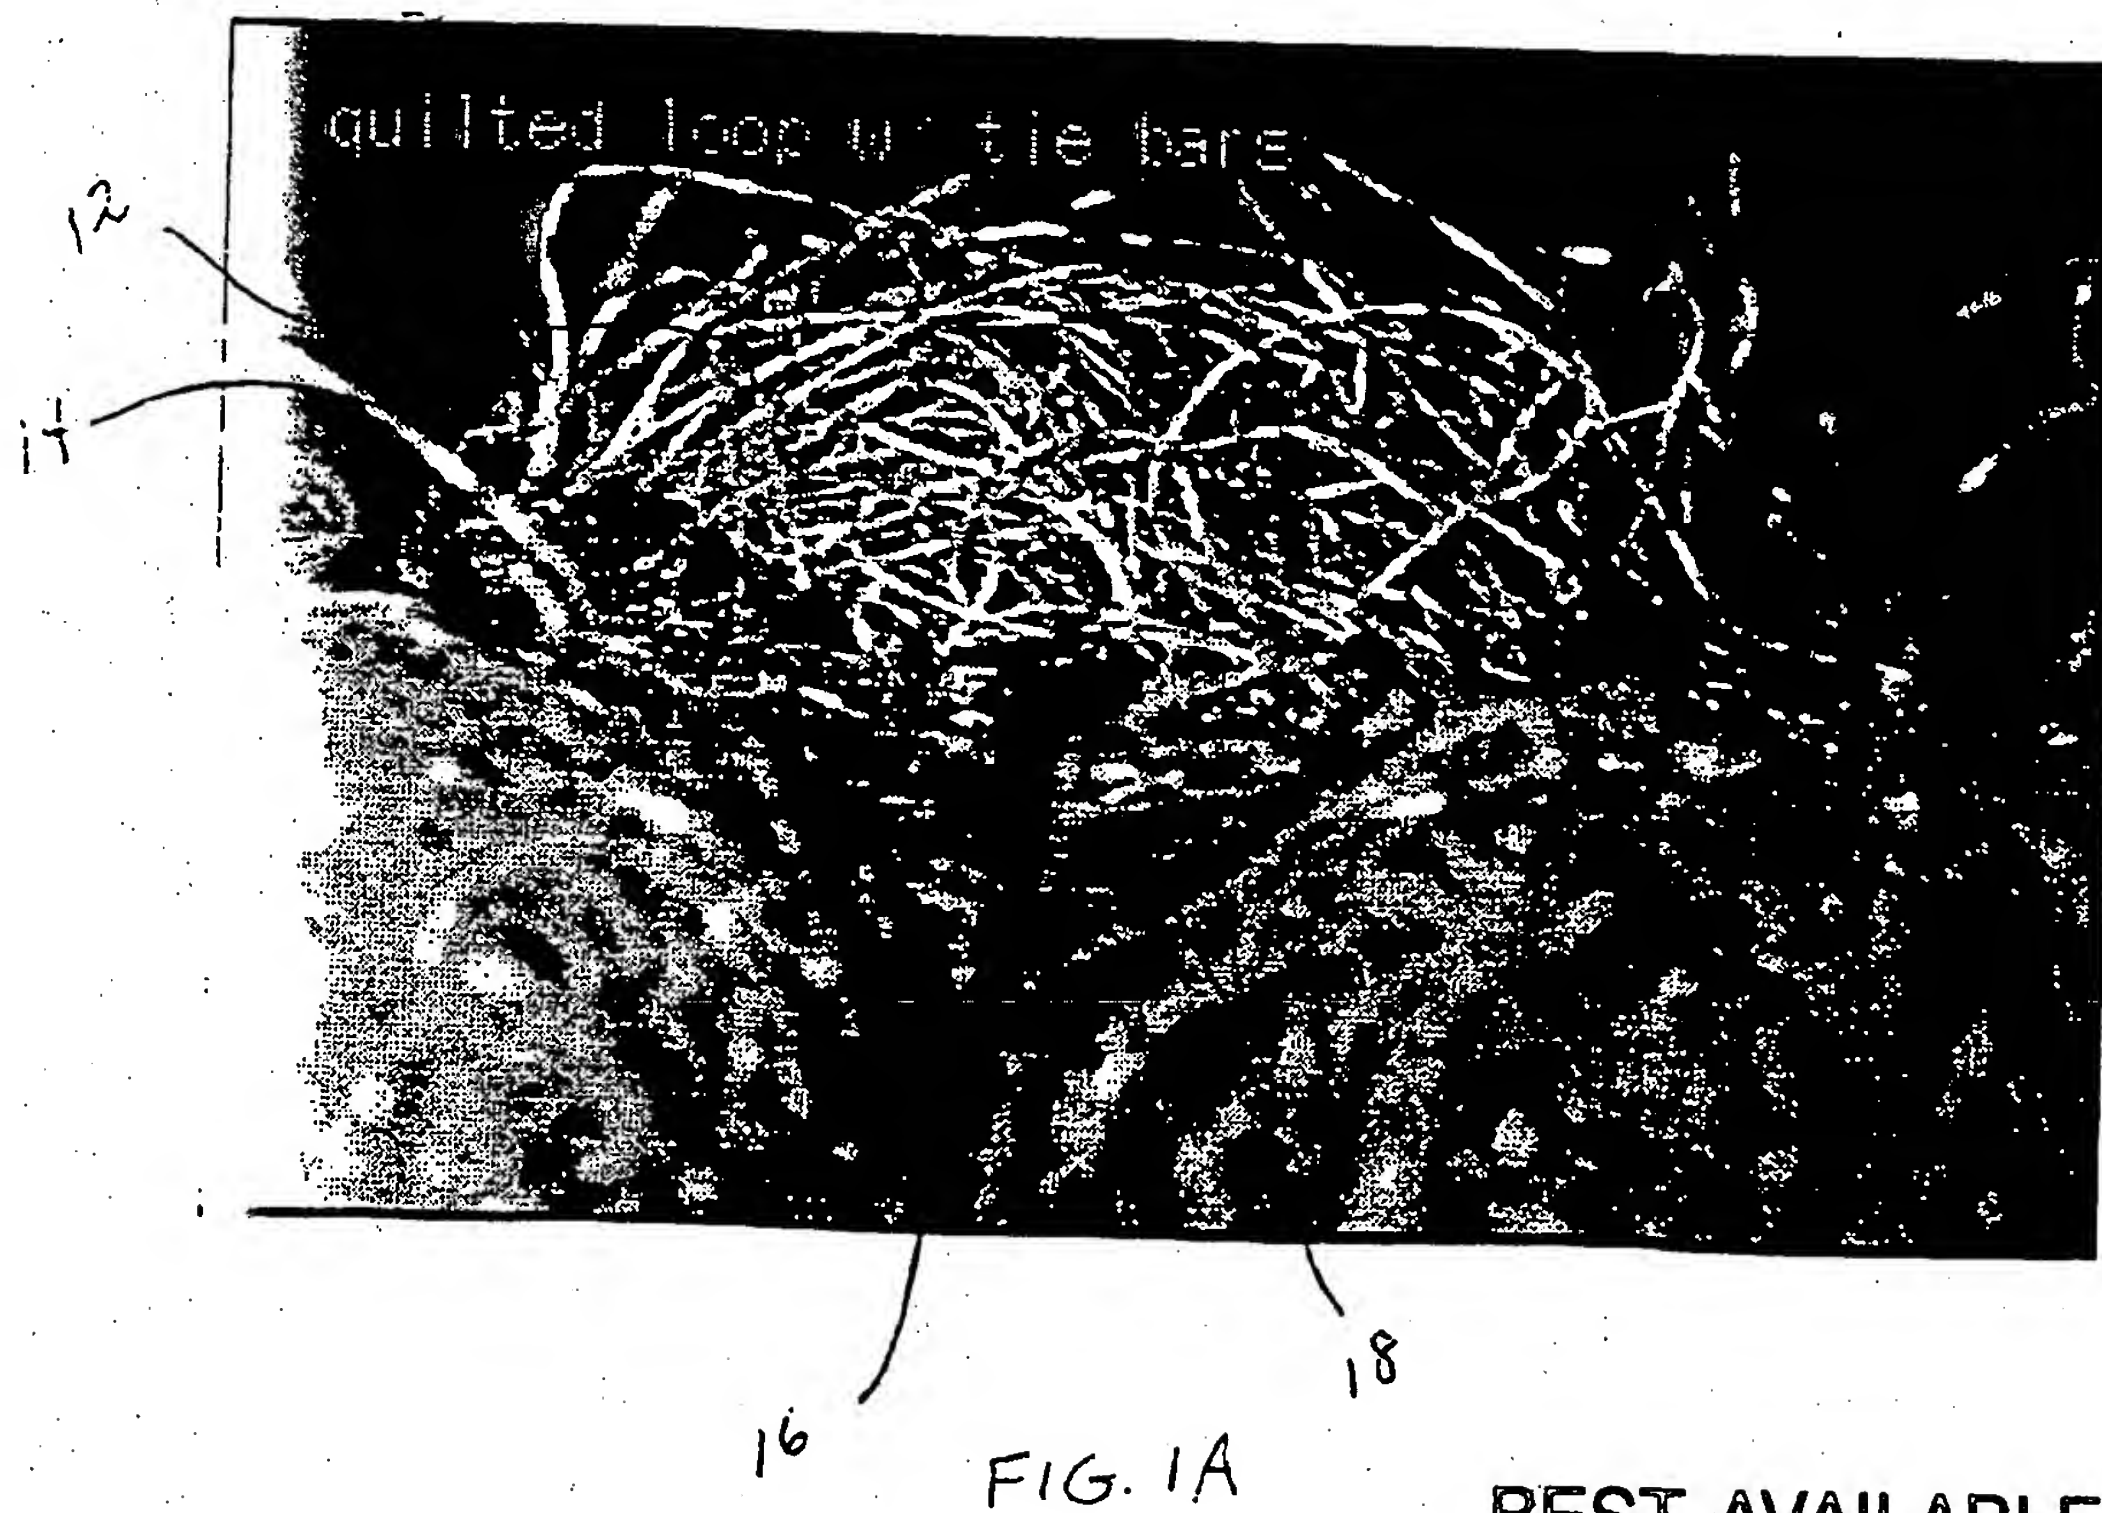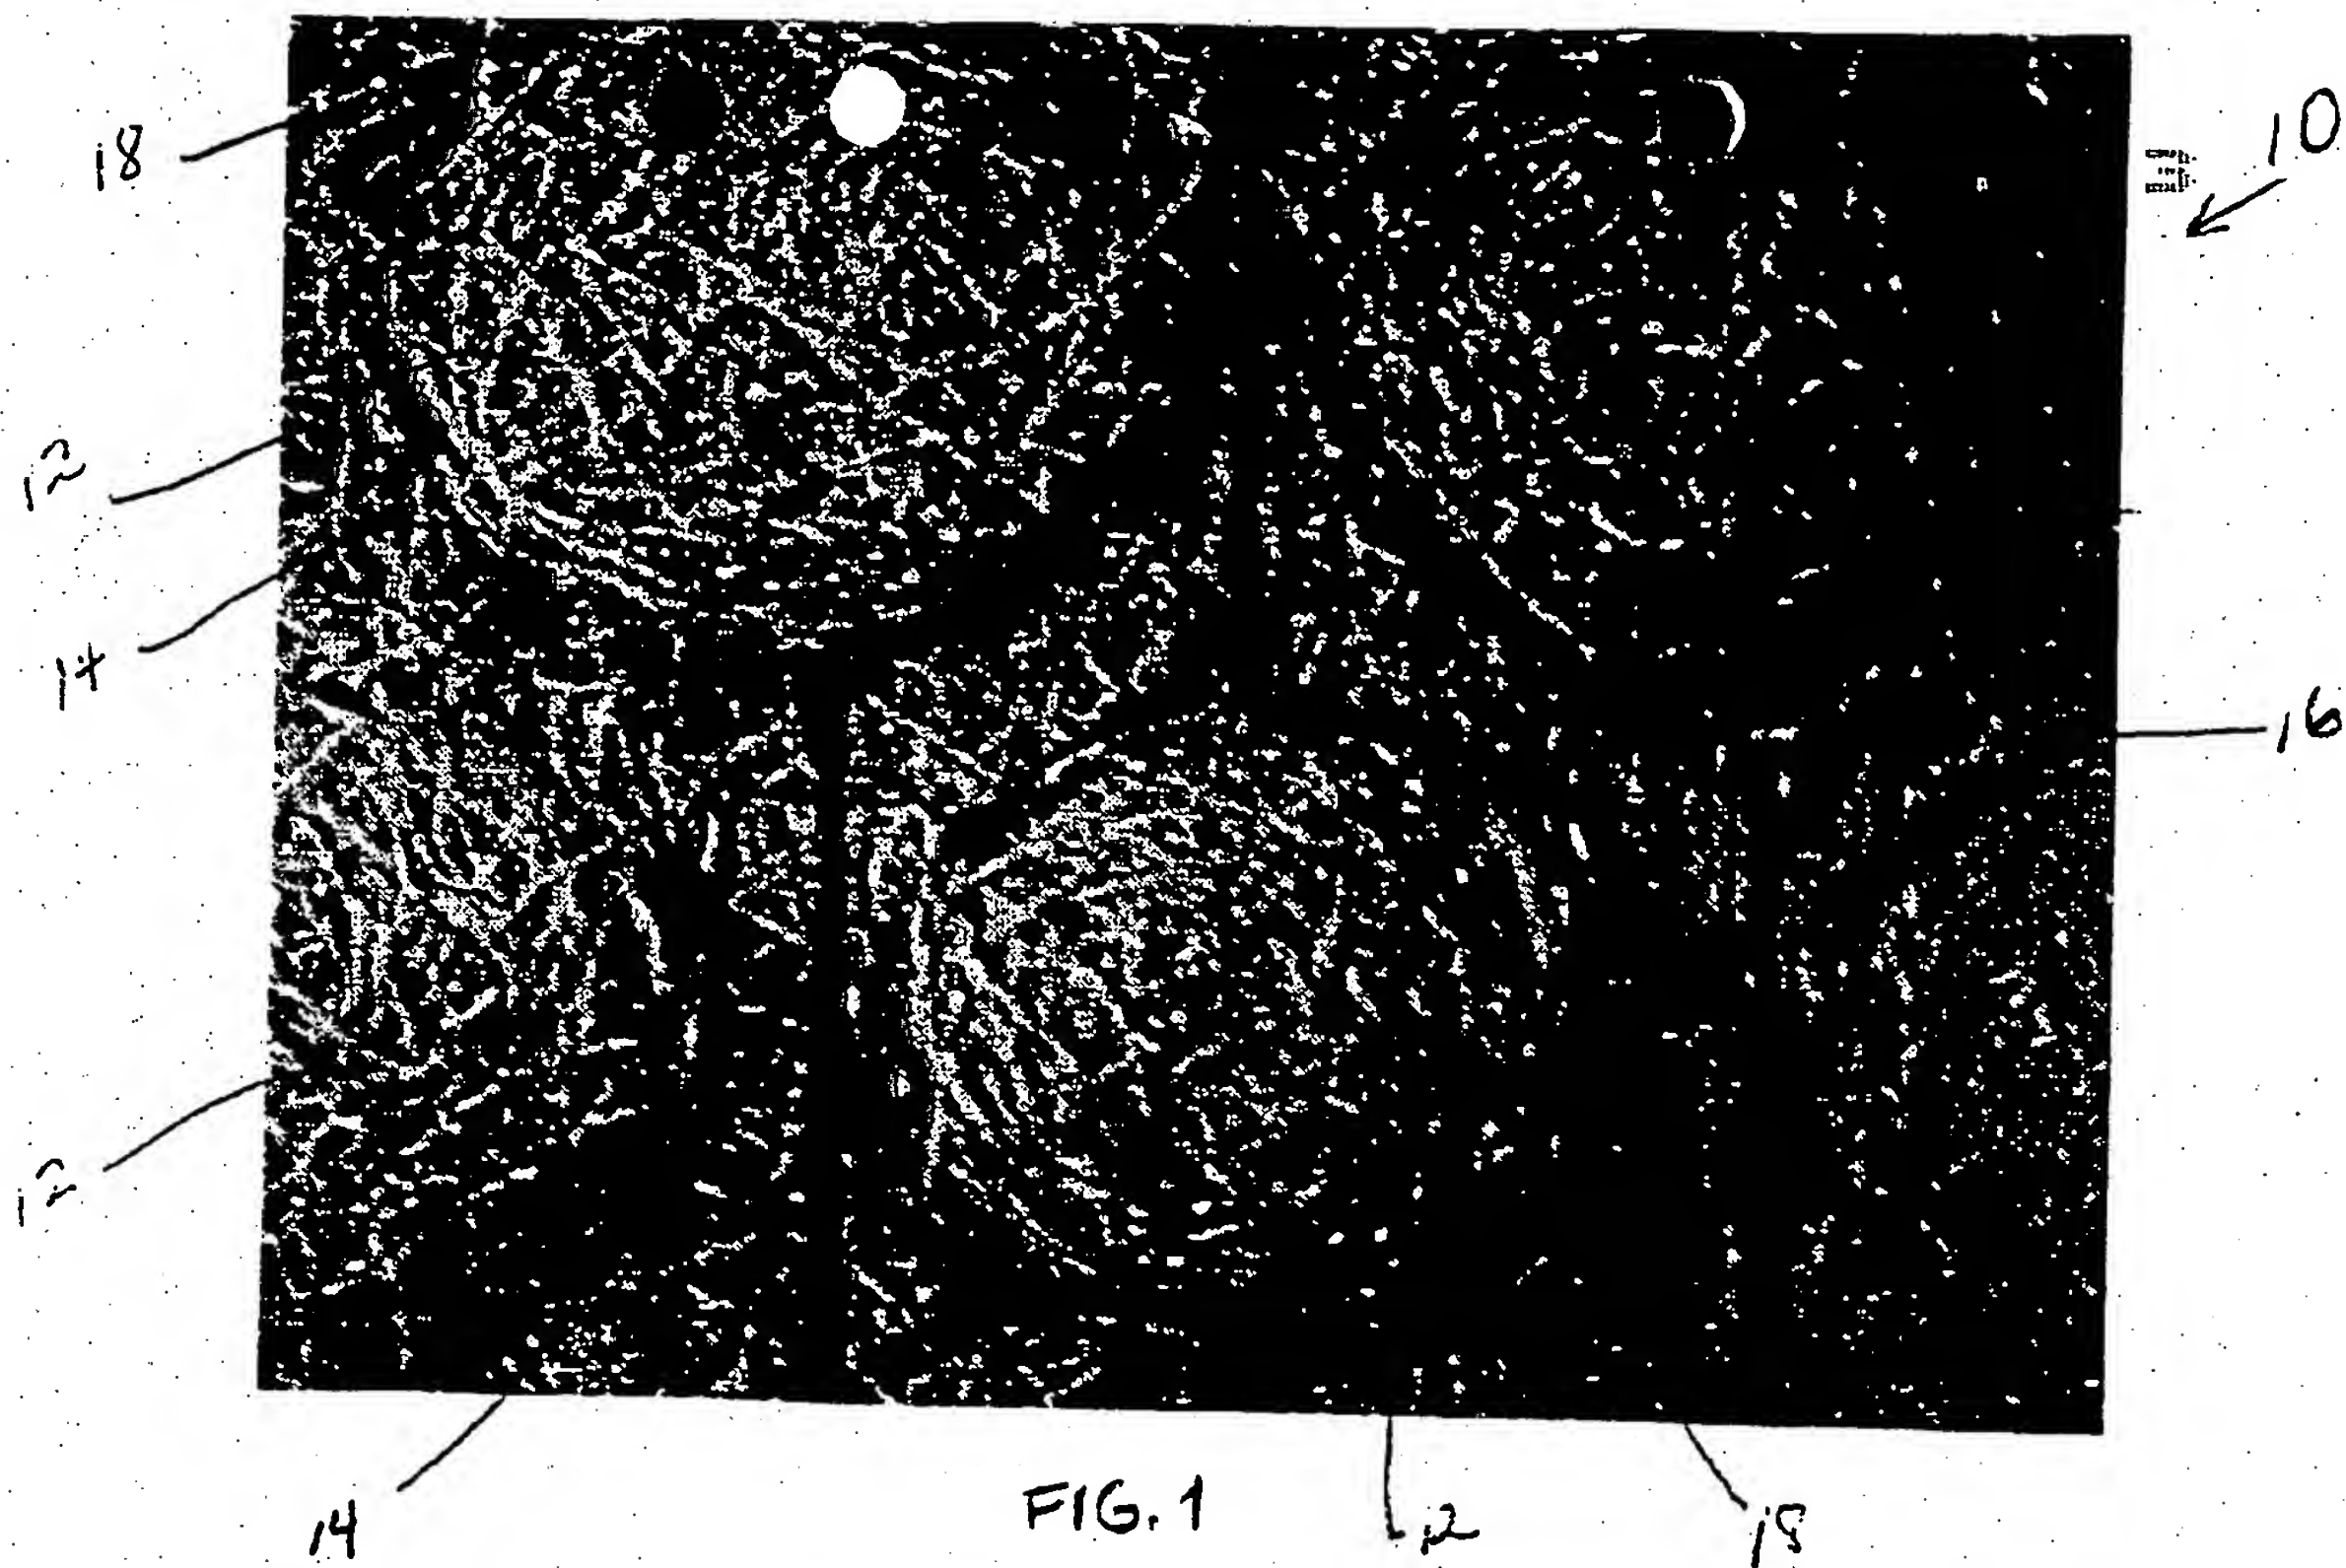

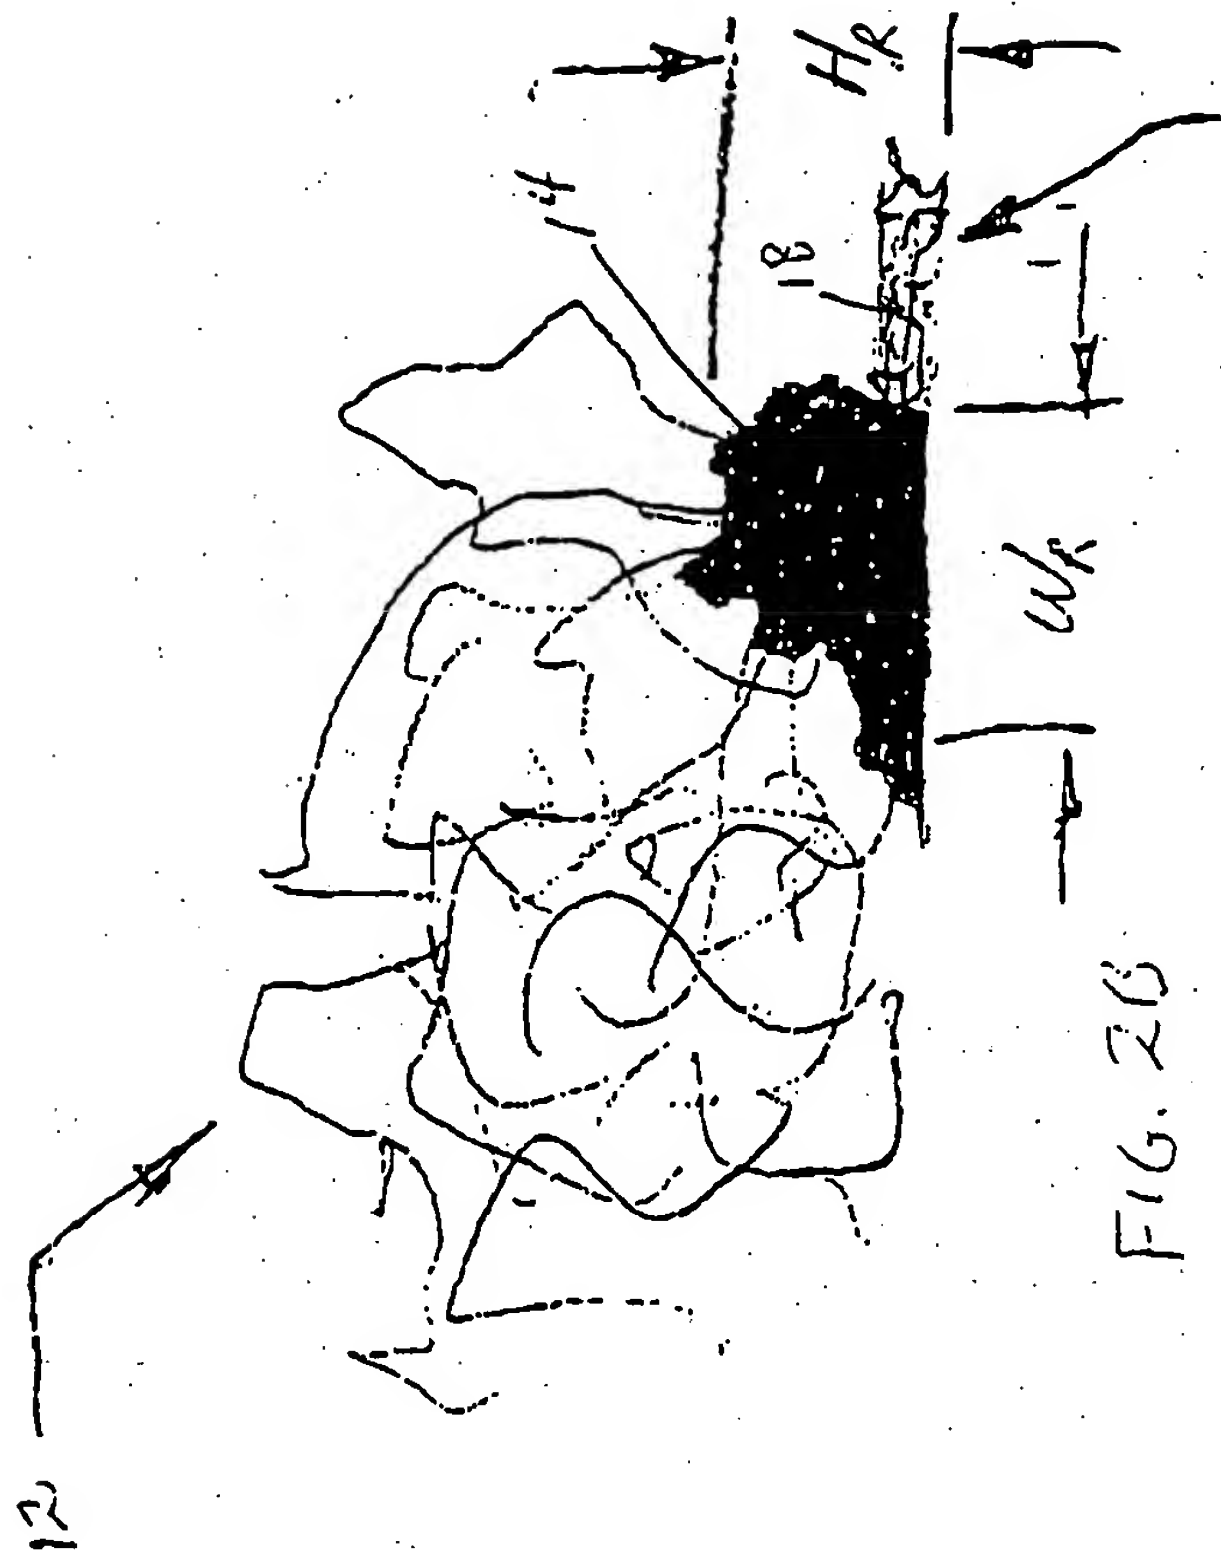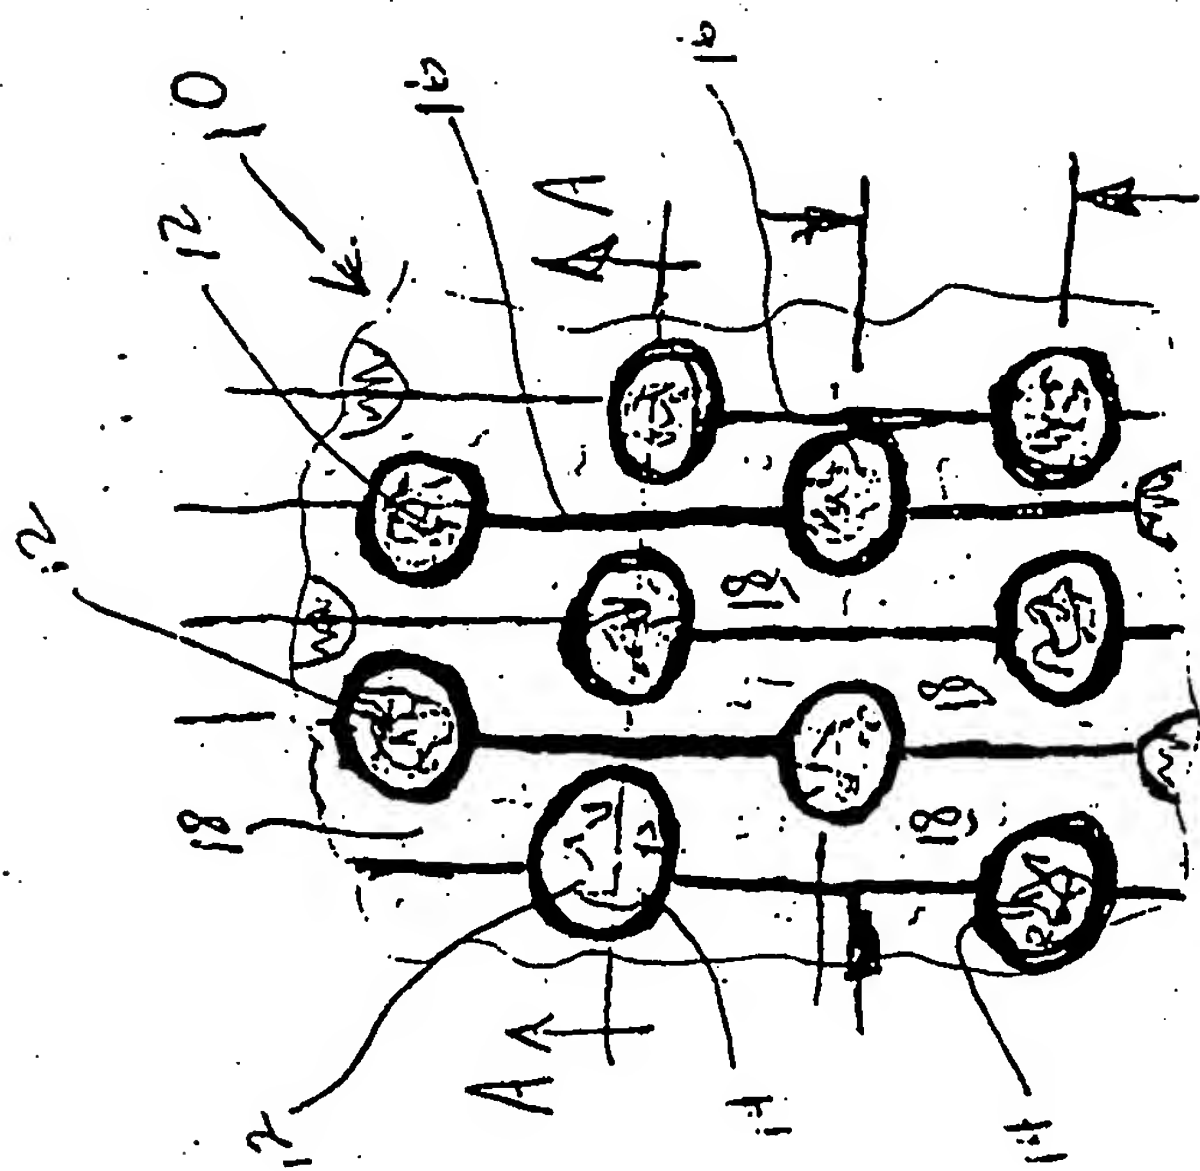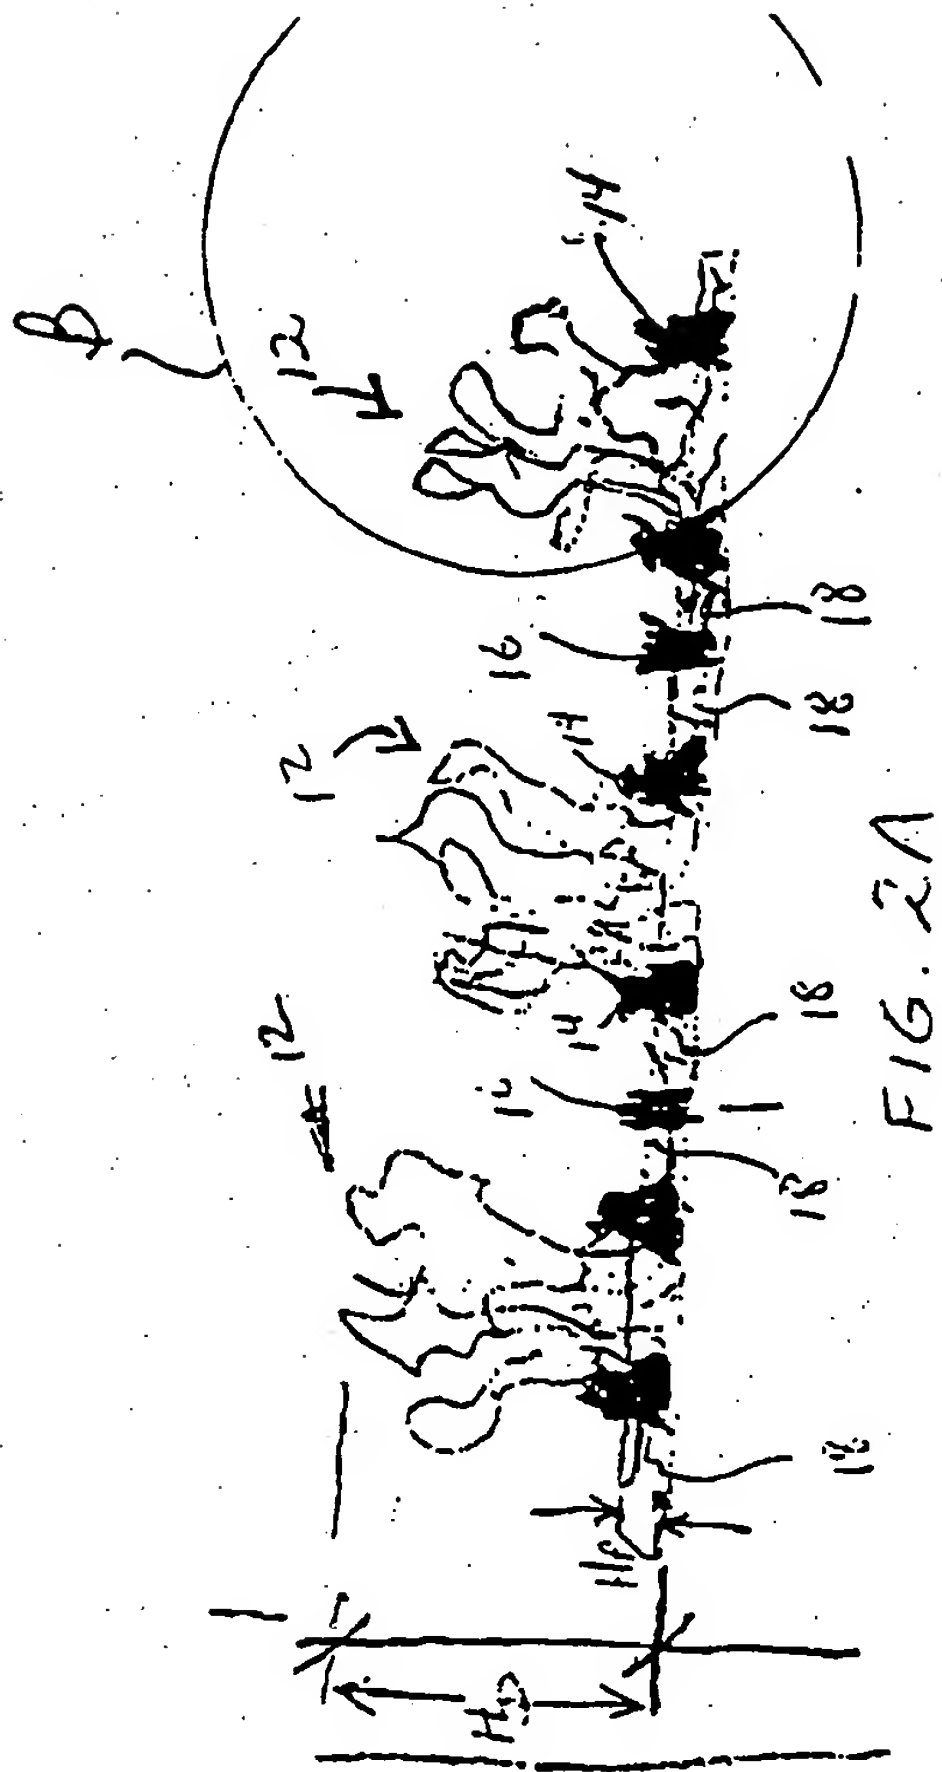

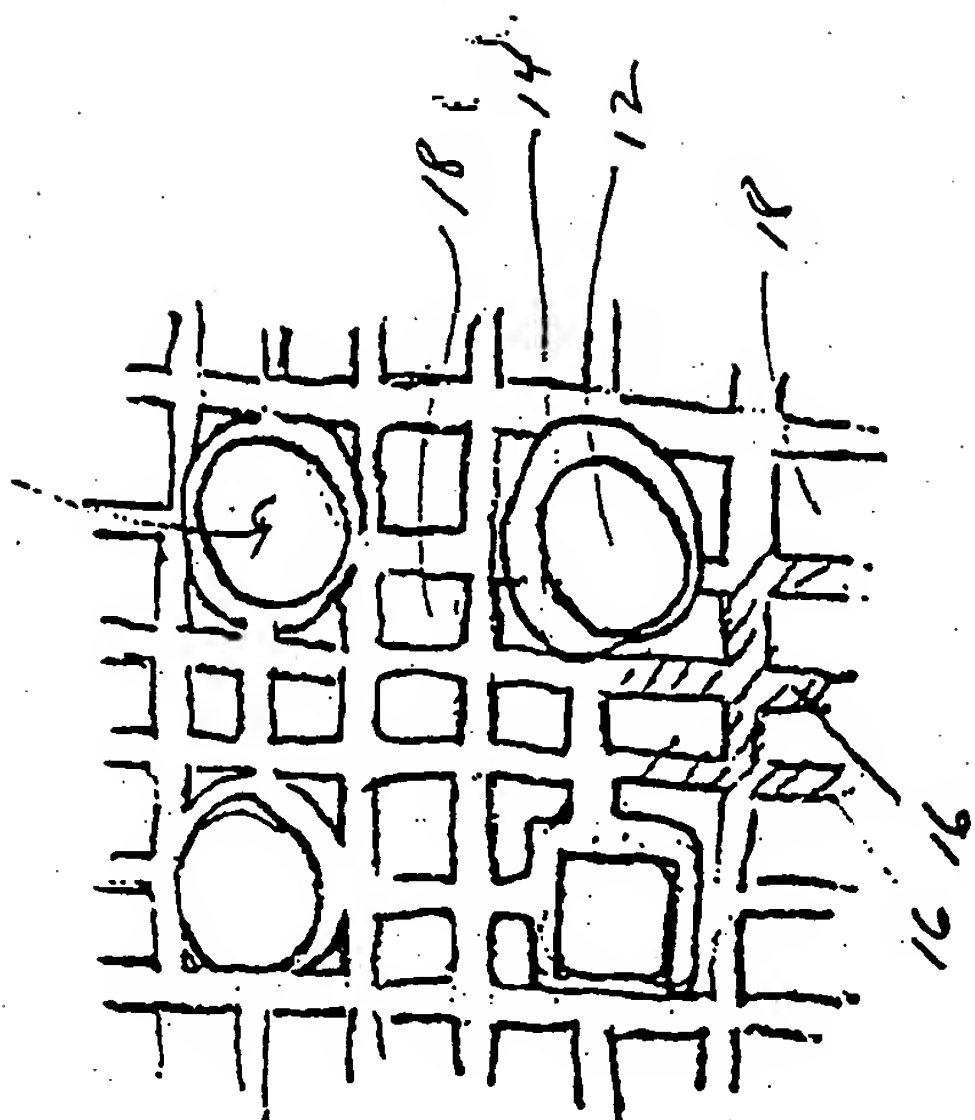


FIG. 4

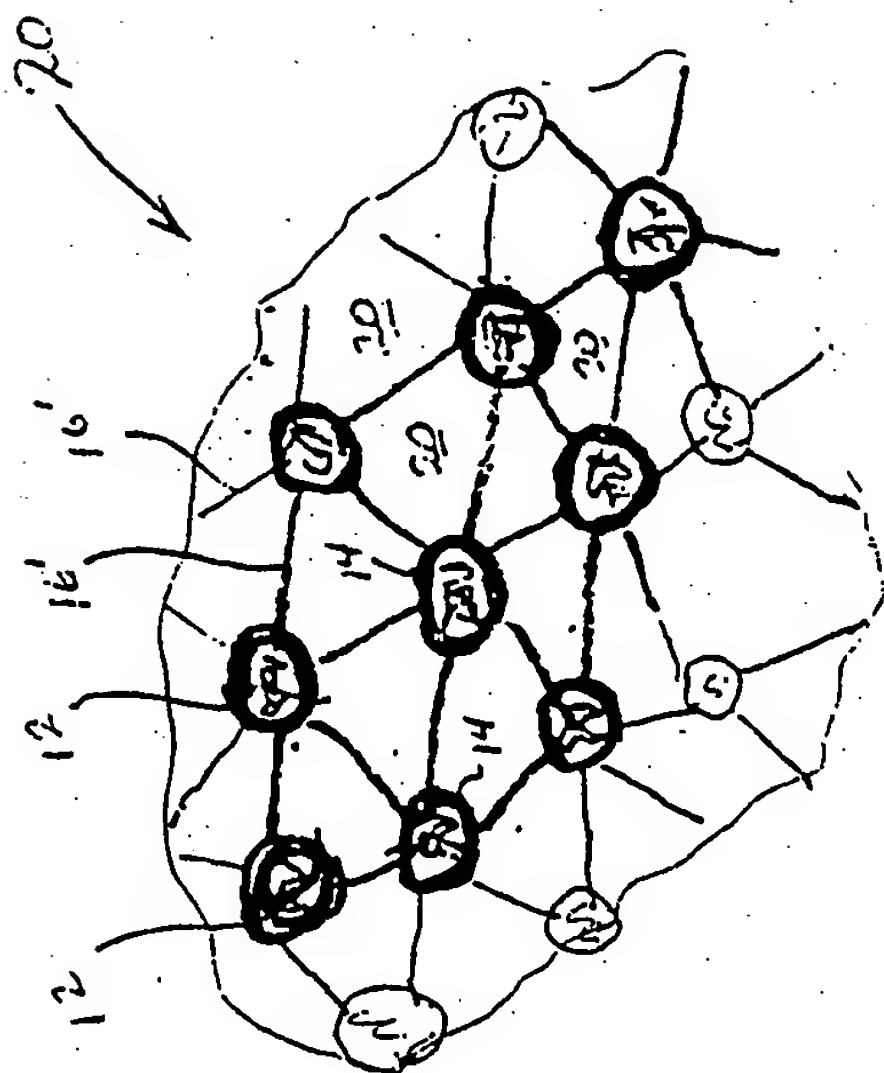


FIG. 3

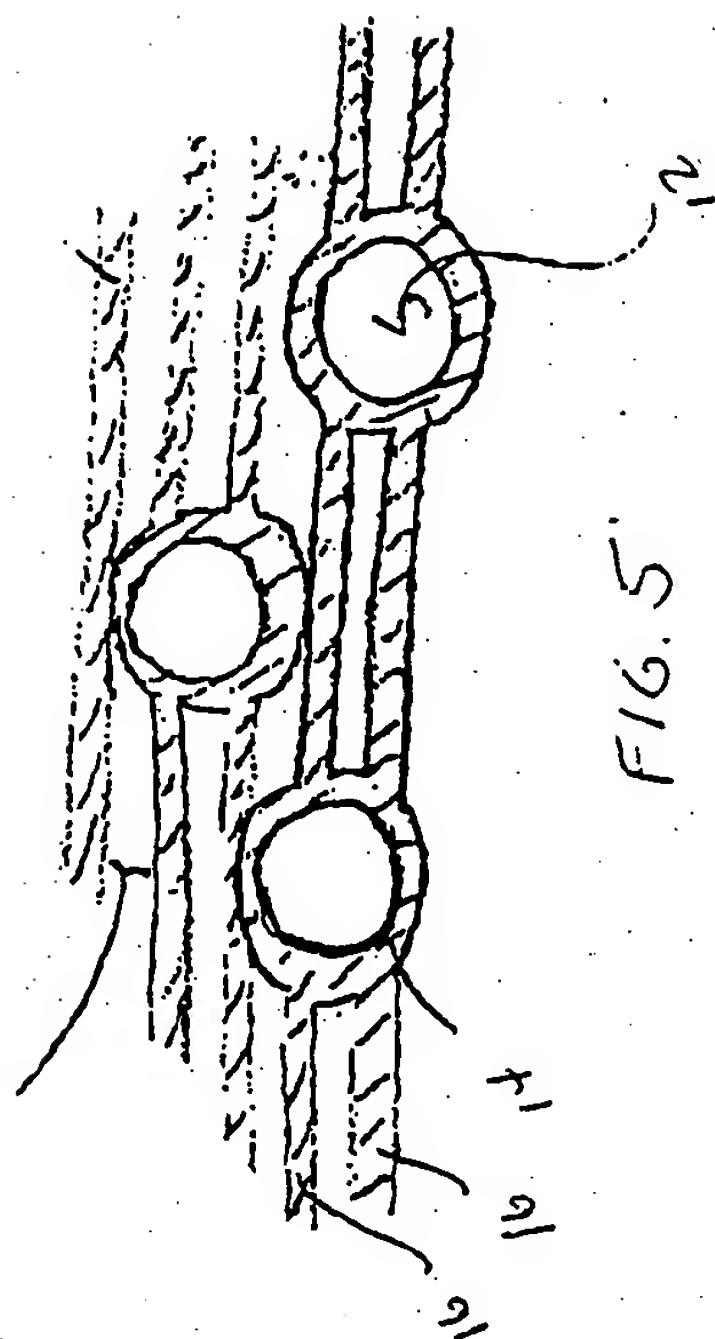


FIG. 5



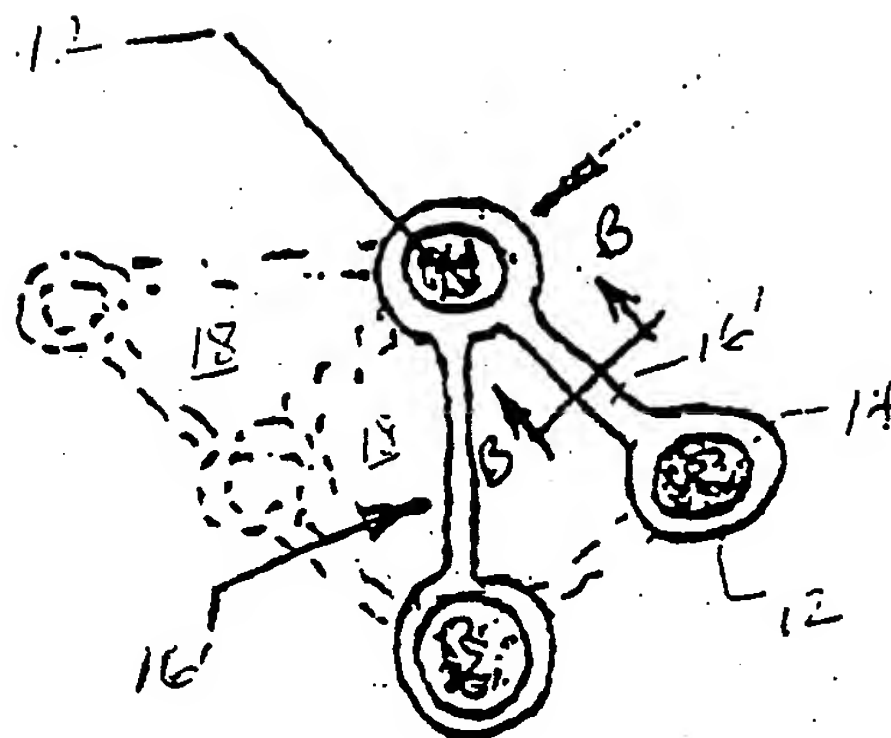


FIG. 3A

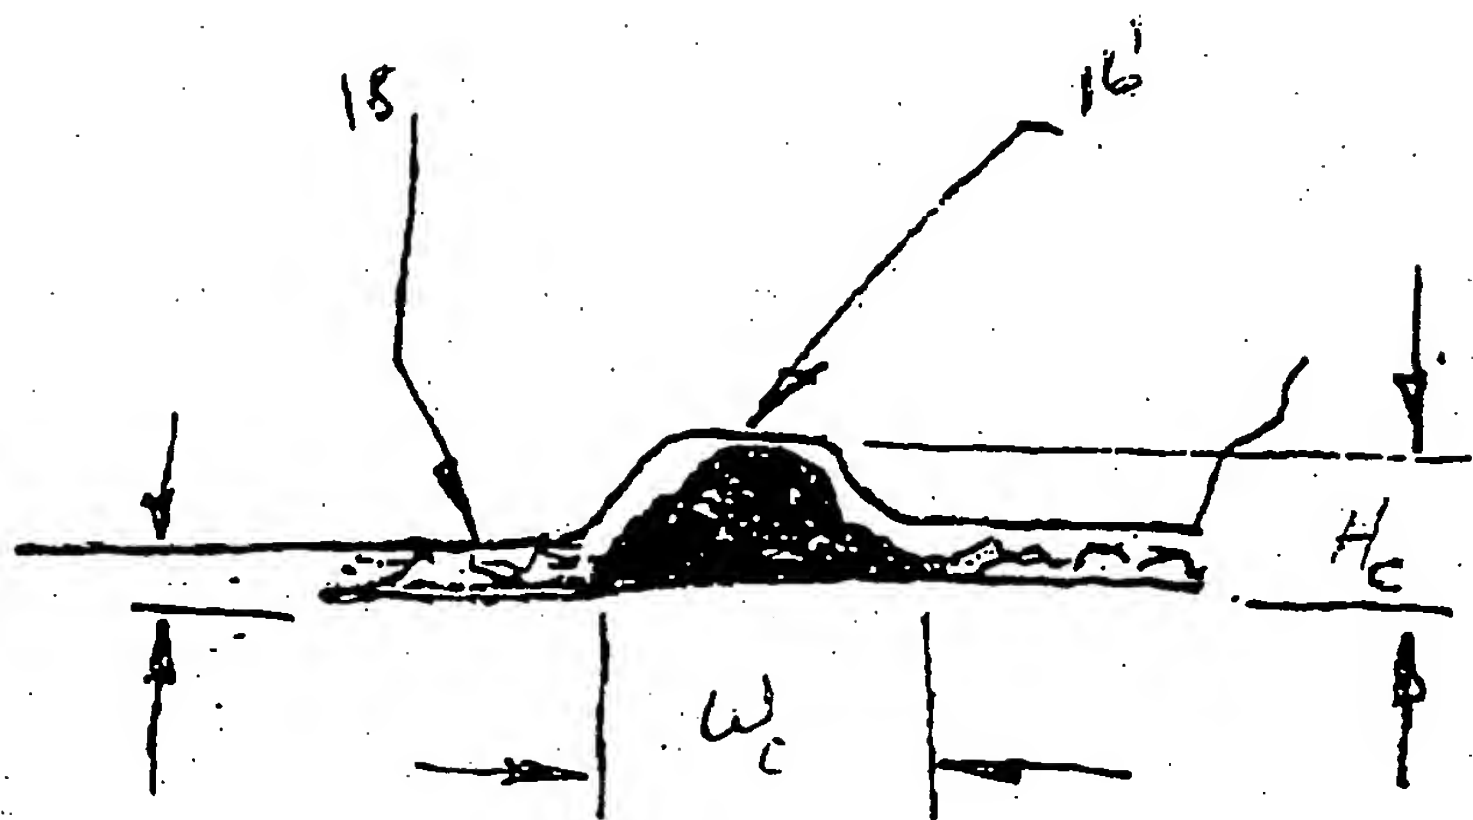


FIG. 3B

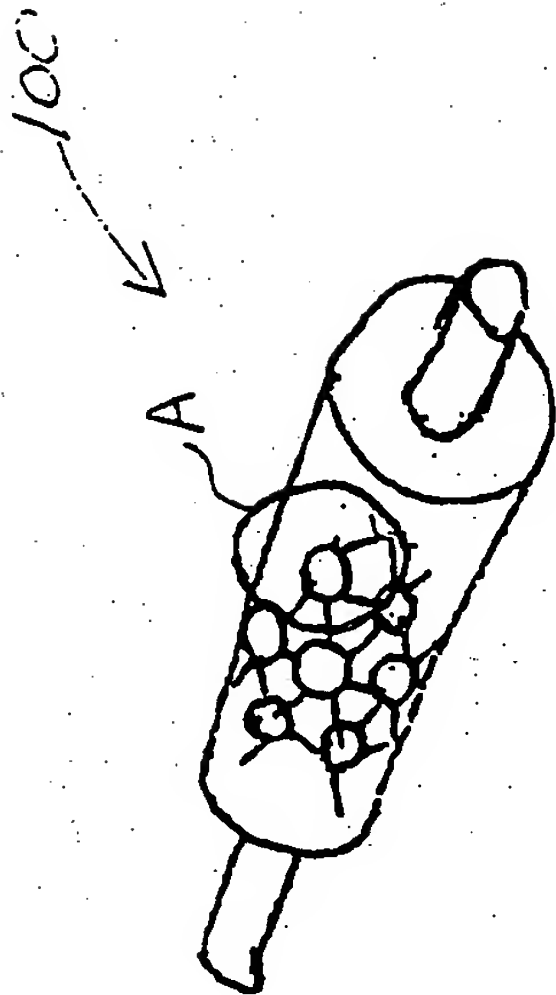


FIG. 6

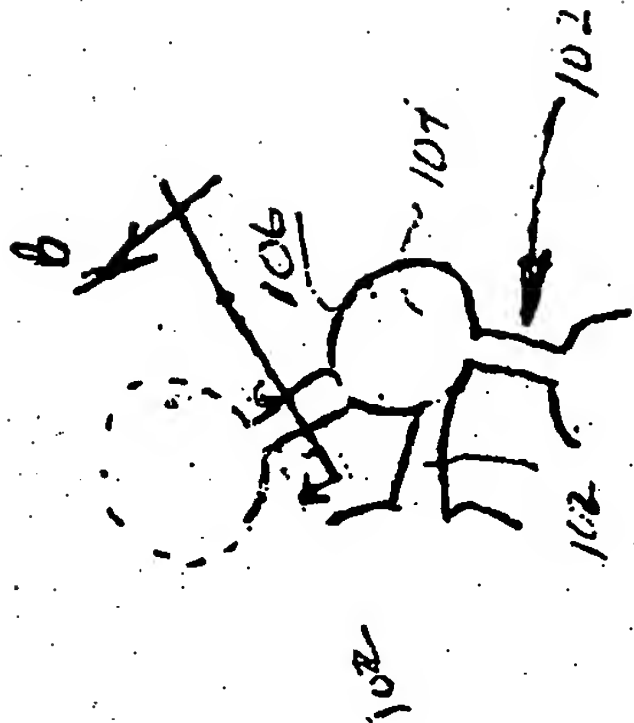


FIG. 6A

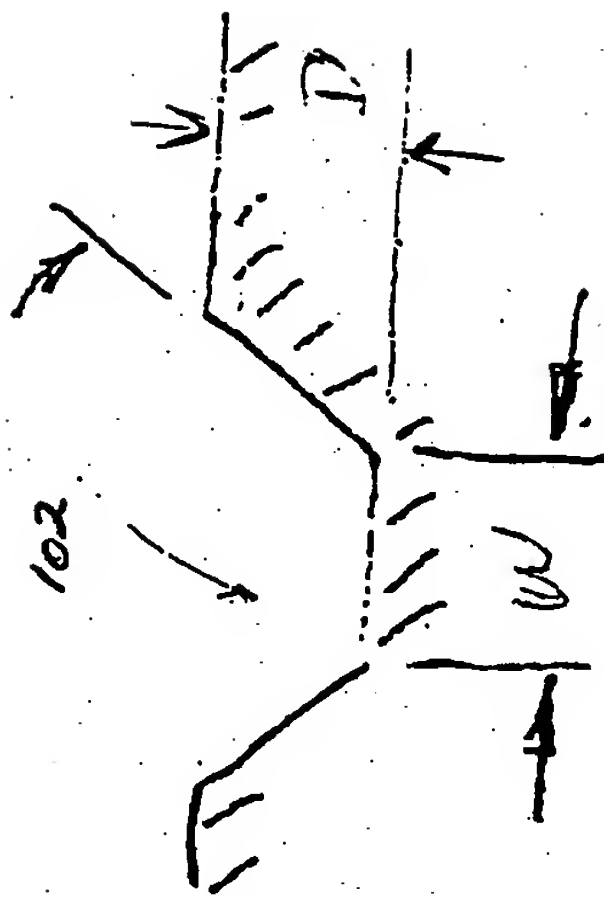


FIG. 6B

FIG. 7

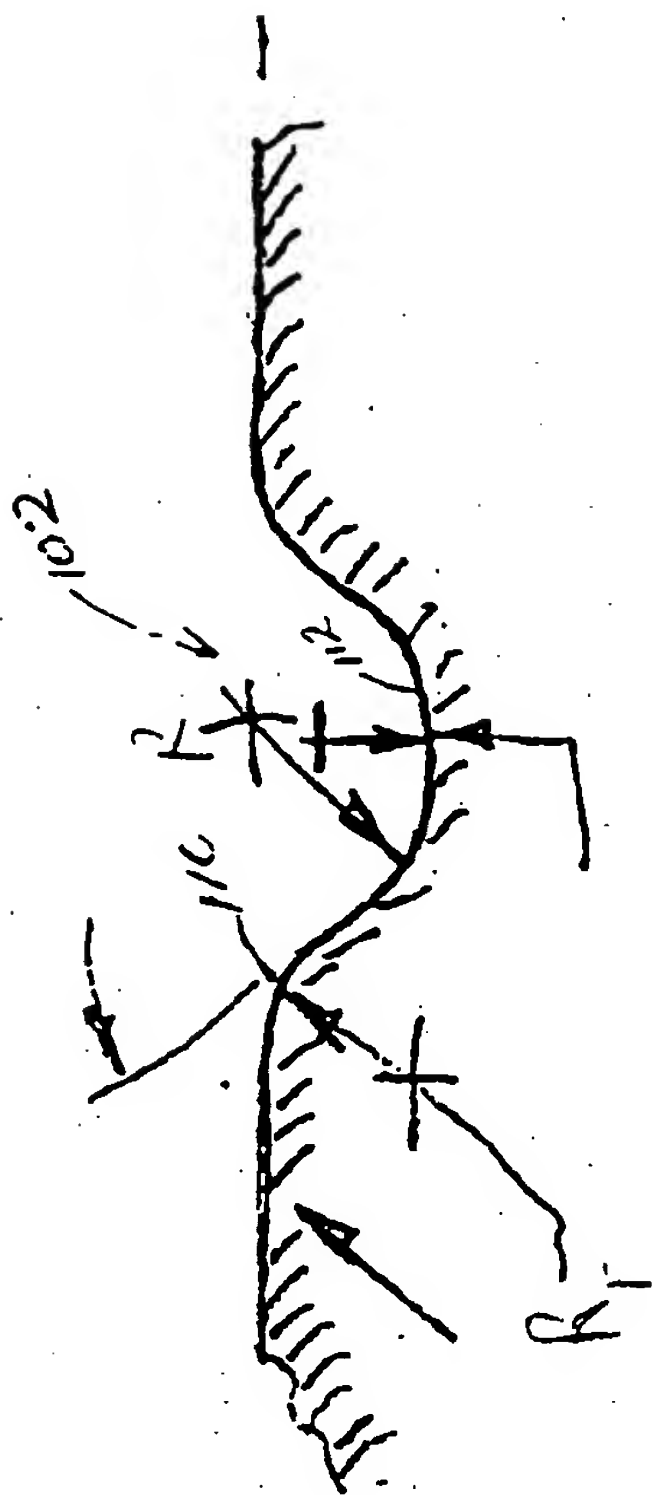


FIG. 8



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
19 December 2002 (19.12.2002)

PCT

(10) International Publication Number  
**WO 02/100207 A3**

(51) International Patent Classification<sup>7</sup>: **A44B 18/00**,  
D04H 1/54, 3/14, 13/00, 11/08

(21) International Application Number: PCT/US02/18373

(22) International Filing Date: 11 June 2002 (11.06.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/297,500 12 June 2001 (12.06.2001) US

(71) Applicant (for all designated States except US): **VELCRO INDUSTRIES B.V.** [NL/NL]; 22-24 Castorweg, Curacao (AN).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PROVOST, George, A.** [US/US]; 27 Brook Road RFD #3, Litchfield, NH 03052 (US). **SHEPARD, William, H.** [US/US]; 7 Highland Drive, Amherst, NH 03031 (US).

(74) Agent: **LEBER, Celia, H.**, Fish & Richardson P.C., 225 Franklin Street, Boston, MA 02110-2804 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).



Published:

— with international search report.

(88) Date of publication of the international search report:  
24 July 2003

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LOOP MATERIALS FOR TOUCH FASTENING

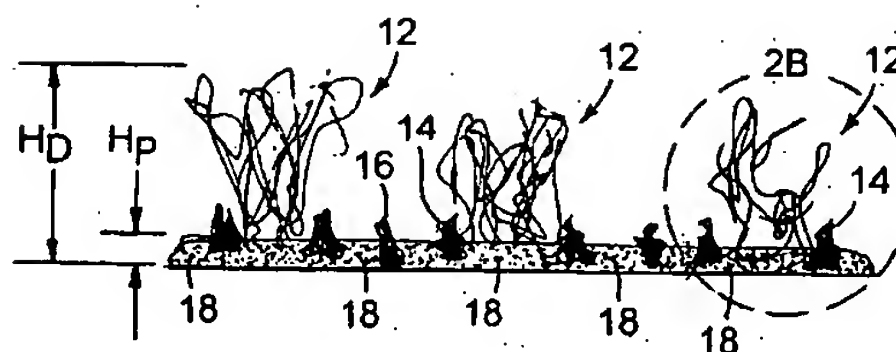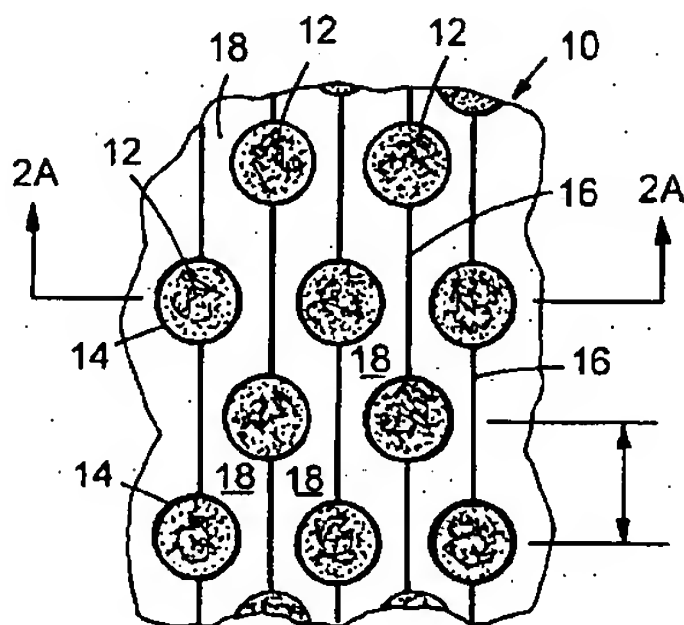

(57) Abstract: Loop materials are provided for touch fastening. The loop materials include a web of nonwoven fibrous material defining a plane, the web including: (a) raised areas (12), elevated above the plane of the web, defining loops constructed for engagement with male touch fastener elements; (b) rib areas (14, 16) surrounding the raised areas to anchor the loops; and (c) between the rib areas, either open areas, or planar areas (18) that are substantially in the plane of the web.

WO 02/100207 A3

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/18373

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A44B18/00 D04H1/54 D04H3/14 D04H13/00 D04H11/08

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A44B D04H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
------------	--	-----------------------

A	WO 98 06290 A (MINNESOTA MINING AND MANUFACTURING COMPANY) 19 February 1998 (1998-02-19) page 7, line 8 -page 11, paragraph 1 page 13, last paragraph -page 14, line 11; claims 1,8,9; figures 1-7 ---	1,18,19, 25,26
A	US 5 858 515 A (KIMBERLY-CLARK WORLDWIDE INC.) 12 January 1999 (1999-01-12) column 9, last paragraph -column 13, paragraph 1; claims 1,7-10; figures 1-6 ---	1,18,19, 25,26
A	EP 0 882 828 A (COROVIN GMBH) 9 December 1998 (1998-12-09) column 2, line 29 -column 4, line 38; claims 1,10; figures 1,2 ---	1,18

-/--

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*8\* document member of the same patent family

Date of the actual completion of the international search

28 November 2002

Date of mailing of the international search report

05/12/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Garnier, F



## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/18373

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 078 582 A (YKK CORPORATION) 28 February 2001 (2001-02-28) paragraph '0052! - paragraph '0054! paragraph '0059! paragraph '0066!; claim 1; figures 1-4,14 ---	1,18
A	EP 1 048 236 A (UNI-CHARM CORPORATION) 2 November 2000 (2000-11-02) paragraph '0015! - paragraph '0025!; claims 1-4; figures 1-3 -----	1,18

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/18373

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9806290	A	19-02-1998	US 5904793 A	18-05-1999
			AU 715930 B2	10-02-2000
			AU 3801697 A	06-03-1998
			BR 9711143 A	17-08-1999
			CN 1227473 A	01-09-1999
			DE 69711057 D1	18-04-2002
			DE 69711057 T2	18-07-2002
			EP 0921738 A1	16-06-1999
			ES 2170406 T3	01-08-2002
			IL 128168 A	24-07-2001
			JP 2001502928 T	06-03-2001
			WO 9806290 A1	19-02-1998
<hr/>				
US 5858515	A	12-01-1999	AU 700999 B2	14-01-1999
			AU 1348497 A	28-07-1997
			BR 9612354 A	13-07-1999
			CA 2239164 A1	10-07-1997
			CN 1209177 A	24-02-1999
			EP 0870081 A1	14-10-1998
			PL 327332 A1	07-12-1998
			TR 9801181 T2	21-02-2000
			WO 9724482 A1	10-07-1997
			RU 2149933 C1	27-05-2000
			ZA 9610867 A	27-06-1997
<hr/>				
EP 882828	A	09-12-1998	DE 19722748 A1	03-12-1998
			EP 0882828 A1	09-12-1998
<hr/>				
EP 1078582	A	28-02-2001	JP 2001061516 A	13-03-2001
			BR 0003906 A	03-04-2001
			CN 1286571 A	07-03-2001
			EP 1078582 A1	28-02-2001
<hr/>				
EP 1048236	A	02-11-2000	JP 2000270908 A	03-10-2000
			CA 2300799 A1	26-09-2000
			CN 1268326 A	04-10-2000
			EP 1048236 A2	02-11-2000
			US 6332250 B1	25-12-2001
<hr/>				

**THIS PAGE BLANK (USPTO)**